

Contact us: +56 9 4205 8882 - +56 9 9828 3172 - contacto@pewenwp.cl - www.pewenwp.cl

Film Faced Plywood for Concrete Forming



We stand out as a company specialized in international trading products derived from wood, offering both raw materials or commodities as products with added value.

Your best choice for concrete forming of slabs and walls
FILM FACED PLYWOOD FOR CONCRETE FORMING

Technical Specifications

- Size: 15mm-18mm-21mm x 4' x 8' (1.22 x 2.44mt)
- Brown-Black Film, 180 gr/m²
- Core of poplar and eucalyptus
- 11 layers (18mm)
- Number of reuses on building site : 4-8 uses per face



Film Faced Plywood for Concrete Forming

Physic Properties		Mechanical Properties	
Density	520 Kg/m ³	Bending Strenght (MOR) Perpendicular	36 MPa
Weight per board	28 Kg	Bending Strenght (MOR) Parallel	46,48 MPa
N° of boards per pallet	54/55	Modulus of Elasticity (MOE) Perpendicular	4.660 MPa
Weight per pallet	1,531 Kg	Modulus of Elasticity (MOE) Parallel	5.581,6 MPa

CONTACT US

+56 9 4205 8882 - +56 9 9828 3172
 contacto@pewenwp.cl
 www.pewenwp.cl

Handling and Maintenance

1. Edge Sealing

- Board edges are factory sealed.
- Edges or cut edges must be sealed with waterproof paint.

2. Hole Sealing


- Any hole caused in the surface of the board must be sealed immediately to prevent the entry of water and humidity, thus preventing swelling and deformation of the surface.

3. Cleaning and Unmolding

- To obtain optimal performance from the film board, it should be cleaned immediately after each use.
- It can be cleaned with a suitable release agent, or with water using a hard brush.
- If it is necessary to use a scraper, care must be taken not to damage the surface.
- Avoid using wire brushes or sharp metal scrapers to remove solid concrete.

4. Storage

- After use on site, the boards must be stored clean, with proper repairs made if they have suffered any damage.
- They should be stacked well covered and in well-ventilated and shaded places, and on pallets or separators, avoiding contact with the ground.

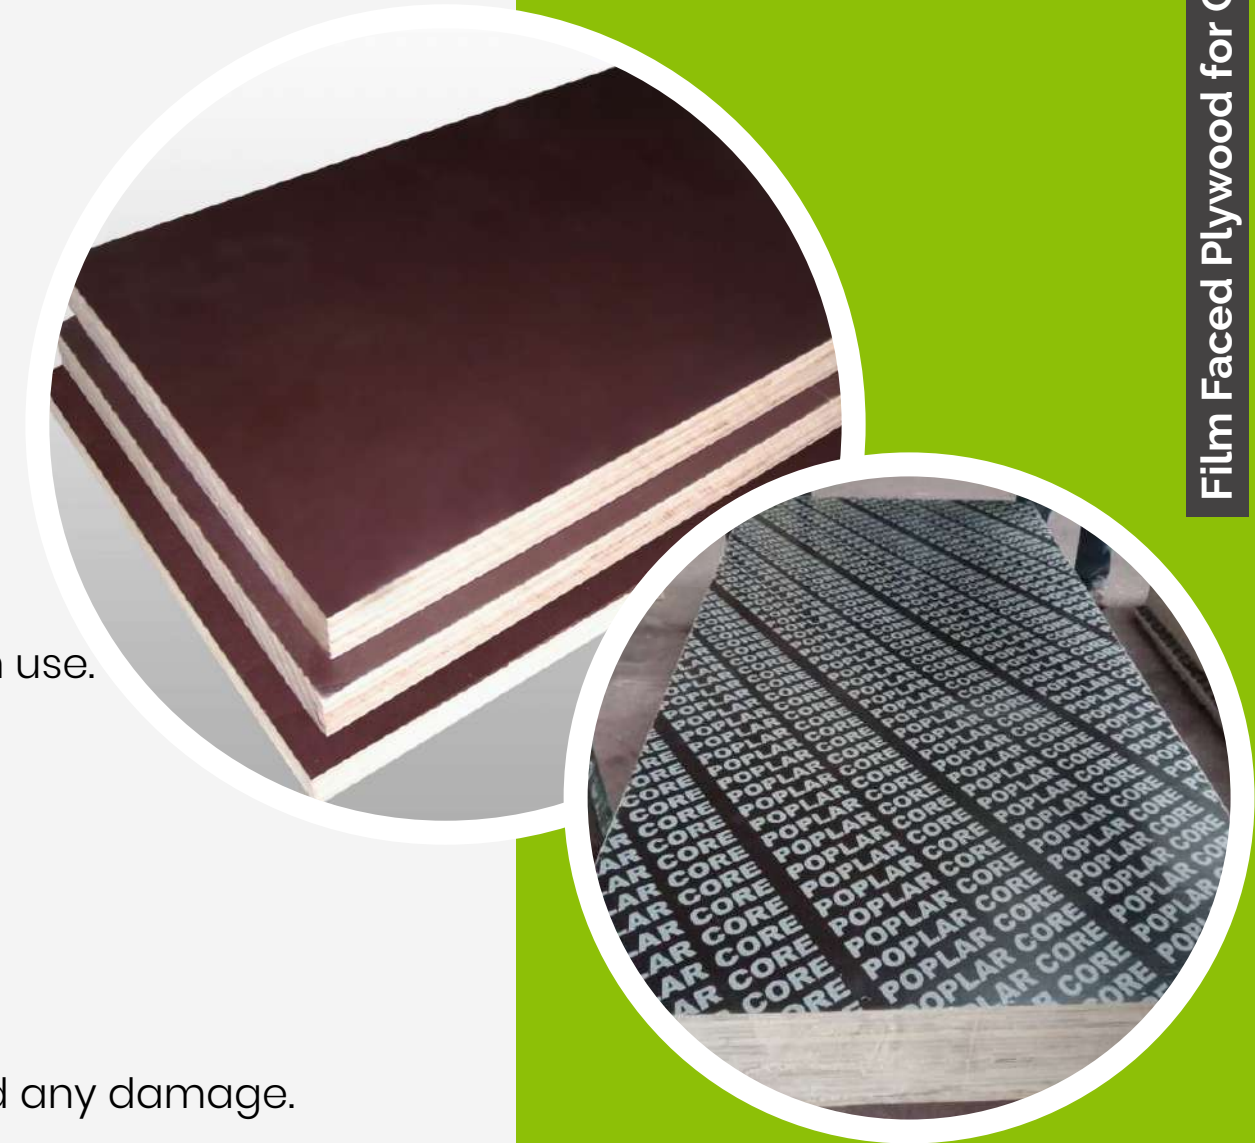

CONTACT US

+56 9 4205 8882 - +56 9 9828 3172
contacto@pewenwp.cl
www.pewenwp.cl



CONTACT US:

+56 9 4205 8882 – +56 9 9828 3172 - contacto@pewenwp.cl

www.pewenwp.cl